


Han-Power S with 1x Han Q8/0-F; 4-6 mm²

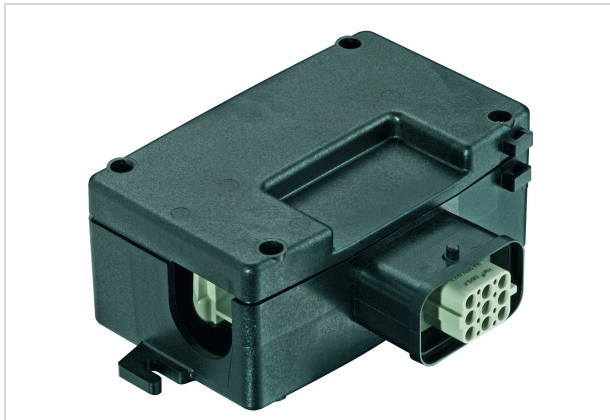

Part number	09 12 008 4811
Specification	Han-Power S with 1x Han Q8/0-F; 4-6 mm ²
HARTING eCatalogue	https://b2b.harting.com/09120084811

Identification

Category	Energy distributors
Series of hoods/housings	Han-Power [®] S
Element	Energy distributor
Specification	With 1x Han [®] Q 8/0 Female insert in Han-Compact [®] Hoods

Version

Termination method	IDC insulation displacement termination
Number of contacts	8
PE contact	Yes

Technical characteristics

Conductor cross-section	4 ... 6 mm ²
Rated current	25 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500



Pushing Performance

Technical characteristics

Degree of protection acc. to IEC 60529	IP65
--	------

Material properties

Material (contacts)	Copper alloy
Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA) Fibre-glass reinforced
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

Specifications and approvals

Specifications	EN 60664-1 IEC 61984
----------------	-------------------------

Commercial data

Packaging size	1
Net weight	329 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27142409 Small distribution board