

## SEK-18 SV MA STD ANG29 RKZ 20P PL3

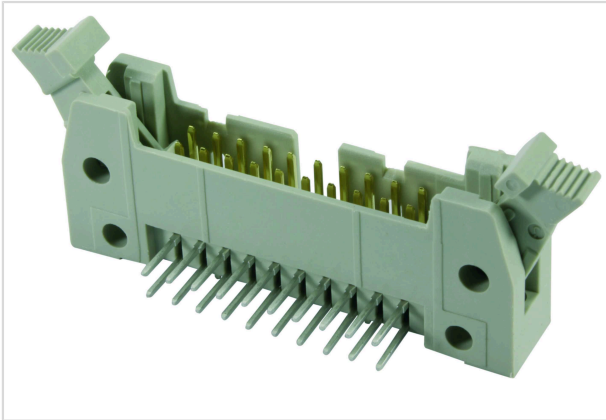


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 18 520 7913  |
| Specification      | SEK-18 SV MA STD ANG29 RKZ 20P PL3  |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09185207913">https://b2b.harting.com/09185207913</a> |

### Identification

|                            |                |
|----------------------------|----------------|
| Category                   | Connectors     |
| Series                     | SEK Standard   |
| Element                    | Male connector |
| Description of the contact | Angled         |

### Version

|                    |                            |
|--------------------|----------------------------|
| Termination method | Wave soldering termination |
| Locking type       | With short levers          |
| Connection type    | PCB to cable               |
| Number of contacts | 20                         |
| Termination length | 2.9 mm                     |
| Performance level  | 3                          |

### Technical characteristics

|                                    |                           |
|------------------------------------|---------------------------|
| Contact rows                       | 2                         |
| Contact spacing (termination side) | 2.54 mm                   |
| Rated current                      | 1 A                       |
| Rated voltage                      | 500 V                     |
| Insulation resistance              | $>10^9 \Omega$            |
| Contact resistance                 | $\leq 20 \text{ m}\Omega$ |
| Limiting temperature               | -55 ... +125 °C           |
| Insertion and withdrawal force     | $\leq 60 \text{ N}$       |
| Mating cycles                      | $\geq 50$                 |



Pushing Performance

## Technical characteristics

|                           |                               |
|---------------------------|-------------------------------|
| Test voltage $U_{r.m.s.}$ | 1 kV                          |
| Isolation group           | IIIa ( $175 \leq CTI < 400$ ) |

## Material properties

|   |  |
|---|--|
| Material (insert)                         | Thermoplastic resin (PBT)                              |
| Colour (insert)                           | Grey   |
| Material (contacts)                       | Copper alloy   |
| Surface (contacts)                        | Sn over Ni Termination side<br>Gold plated Mating side |
| Material flammability class acc. to UL 94 | V-0  |
| RoHS                                      | compliant  |
| ELV status                                | compliant  |
| China RoHS                                | e  |
| REACH Annex XVII substances               | No   |
| REACH ANNEX XIV substances                | No   |
| REACH SVHC substances                     | No   |

## Specifications and approvals

|                        |  |
|------------------------|--|
| Specifications         | IEC 60603-13   |
| UL / CSA               | UL 1977 ECBT2.E102079<br>CSA-C22.2 No. 182.3 ECBT8.E102079 |
| Railway classification | F3/I3  |

## Commercial data

|                                |                        |
|--------------------------------|------------------------|
| Packaging size                 | 100                    |
| Net weight                     | 8.5 g                  |
| Country of origin              | Switzerland            |
| European customs tariff number | 85366990               |
| eCl@ss                         | 27440402 PCB connector |

### Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Temperature raise
- ② Derating curve
- ③ Derating curve 80%

### Cross section of solder termination

