

## DIN-Signal high current m, 40A solder

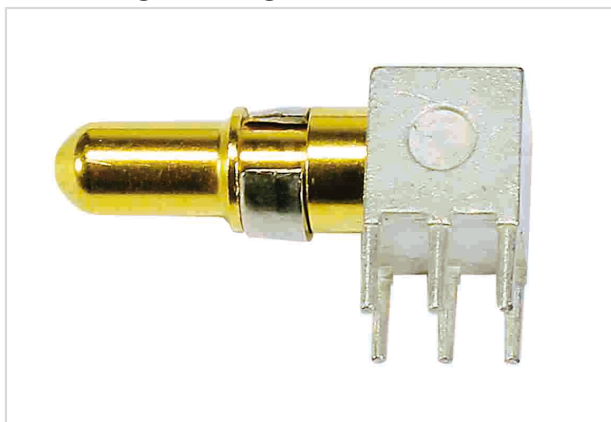


Image is for illustration purposes only. Please refer to product description.

Part number	09 03 000 6127
Specification	DIN-Signal high current m, 40A solder
HARTING eCatalogue	<a href="https://b2b.harting.com/09030006127">https://b2b.harting.com/09030006127</a>

### Identification

Category	Contacts
Type of contact	PCB solder contact
Description of the contact	Angled
Contacts for	DIN 41612 Type M DIN 41612 Type MH 21+5 DIN 41612 Bauform M 0+2 har-modular <sup>®</sup> M module, male, angled

### Version

Gender	Male contact for male connectors
Manufacturing process	Turned contacts
Performance level	1

### Technical characteristics

Operating current	≤40 A
-------------------	-------

### Material properties

Material (contacts)	Copper alloy
Surface (contacts)	Noble metal
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No



Pushing Performance

## Material properties

REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

Specifications	DIN 41626
----------------	-----------

## Commercial data

Packaging size	30
Net weight	3.03 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440204 Contact for industrial connectors